



CANTALUPI srl Y.L.D. PHOTOMETRICS TEST

Item: PATTY

Glass: Sanded


Bulb: G4 10W 24V

Operator: Eng. C.Guiducci

Date: 9/29/99

Corner (degree)	Relative int.	Luminous int.	Illumination - E _o (lx)		
	Ir (lm)	I(cd) = (Ir)x4	1m	2m	3m
0	18.00	72.00	72.00	18.00	8.00
5	17.40	69.60	68.81	17.20	7.65
10	16.50	66.00	63.04	15.76	7.00
15	15.70	62.80	56.60	14.15	6.29
20	13.90	55.60	46.14	11.53	5.13
25	11.90	47.60	35.44	8.86	3.94
30	9.80	39.20	25.46	6.37	2.83
35	7.80	31.20	17.15	4.29	1.91
40	5.90	23.60	10.61	2.65	1.18
45	4.30	17.20	6.08	1.52	0.68
50	3.00	12.00	3.19	0.80	0.35
55	2.10	8.40	1.59	0.40	0.18
60	1.60	6.40	0.80	0.20	0.09
65	1.10	4.40	0.33	0.08	0.04
70	0.90	3.60	0.14	0.04	0.02
75	0.50	2.00	0.03	0.01	0.00
80	0.30	1.20	0.01	0.00	0.00
85	0.10	0.40	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00
Imax = 72.00		diameters:	1.25	2.50	3.75
Amplitude corner = 64					

Photometric curve

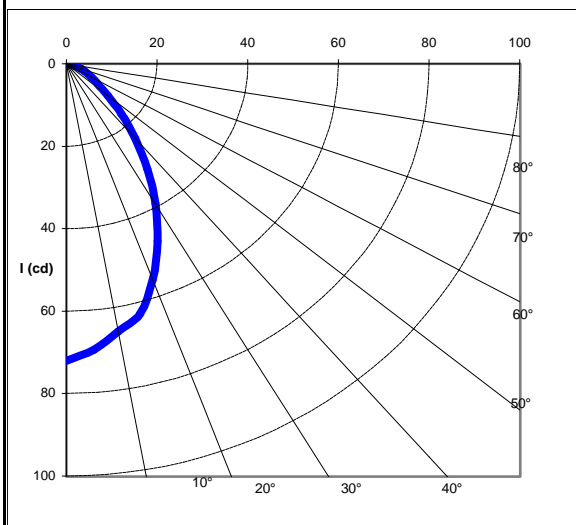

Amplitude diagram

